This article has been accepted for publication in IEEE Access. This is the author's version which has not been fully edited and content may change prior to final publication. Citation information: DOI 10.1109/ACCESS.2022.3205641

IEEE Access
Multidisciplinary | Rapid Review | Open Access Journal

Date of publication xxxx 00, 0000, date of current version xxxx 00, 0000.

Digital Object Identifier xx.xxxx/ACCESS.xxxx.xxxxxxx

Radar-aided Communication Scheduling Algorithm for 5G and Beyond Networks

AHMAD M. JARADAT[1], AHMED NAEEM[1], MEHMET IZZET SAĞLAM[2], MESUT KARTAL [3], and HÜSEYIN ARSLAN [1],(Fellow, IEEE)

[1]Department of Electrical and Electronics Engineering, Istanbul Medipol University, 34810 Istanbul, Turkey
[2]Department of Research and Development, Turkcell Teknoloji Arastirma ve Gelistirme Anonim Sirketi, Istanbul, Turkey
[3]Department of Electronics and Communication Engineering, Istanbul Technical University, Istanbul, Turkey
[4]Department of Electrical and Electronics Engineering, Istanbul Medipol University, 34810 Istanbul, Turkey.

Corresponding author: Ahmad M. Jaradat (e-mail: ahmad.jaradat@std.medipol.edu.tr).

This work was supported in part by the Scientific and Technological Research Council of Turkey (TUBITAK) under Grant No. 5190014.

ABSTRACT Radar and communication coexistence is an upcoming technology with numerous research opportunities in the medium access control (MAC) layer, particularly in scheduling and radio resource management (RRM). More efficient scheduling algorithms are needed with the wide range of applications that the wireless environment is experiencing. We investigate an echo-based scenario in the radar-aided vehicular communication system in which an echo is reflected from a target. Unlike the conventional scheduling mechanisms where signal-to-interference-plus-noise ratio (SINR) is exploited, this paper proposes a new radar-aided communication scheduling algorithm by utilizing parameters such as range and velocity with the classical SINR measurements. The proposed algorithm schedules the available resources by extracting information from the radar echo. The proposed radar-aided communication scheduling scheme provides a more flexible design by adding new parameters, resulting in a more efficient algorithm in a broad variety of scenarios. The proposed scheme is beneficial for B5G communication systems that allow localization and sensing as key features of next-generation wireless networks.

INDEX TERMS Radar-aided communication scheduling, range, medium access control (MAC), radio resource management (RRM), scheduling, signal-to-interference-plus-noise ratio (SINR), velocity, 5G new radio (NR) and beyond (B5G).

I. INTRODUCTION

Different 5G services have various Quality of Service (QoS) requirements in terms of bandwidth, latency, packet loss rate, and reliability [1]–[4]. In 5G and beyond (B5G) radio access technologies (RATs), efficient and flexible schedulers are needed to meet the diverse requirements of the future RATs. The general purpose of most traditional schedulers is to exploit channel variations between user equipments (UEs) and, preferably, to schedule transmissions to a UE when channel conditions are favorable. At the very least, most scheduling strategies require information about UE's channel conditions, buffer status and priorities of the different data flows, and the interference situation in neighboring cells. Medium access control (MAC) is used for scheduling information reporting. The scheduling strategy is implementation-specific and does not conform to the 3rd Generation Partnership Project (3GPP) specifications.

Different UEs may experience diverse radio conditions at a certain time in the mobile network environment. In many scenarios, system capacity can be increased by the low fairness schemes of conventional scheduling algorithms. These algorithms increase the prioritization of UEs with good channel conditions. On the other hand, UEs with average or bad radio conditions cannot be scheduled. The conventional schedulers enable higher data rates due to a tradeoff between UEs fairness and system capacity. The Mobile Network Operators (MNOs) demand consistent UE and system data rates with the minimum QoS requirements. Besides the UE requirements, network radio resource capacity is an essential issue for the existing mobile network operations, which cover the whole network life cycle management, such as capacity monitoring, optimization, and expansion. More specifically, the MNOs seek more efficient schedulers while considering commercial scheduling methods such as Proportional Fair (PF), Round Robin (RR), and Best Channel Quality Indicator (BCQI) [5]. MNOs need more and more radio resources due to the growing traffic in their current commercial mobile net-

This work is licensed under a Creative Commons Attribution 4.0 License. For more information, see https://creativecommons.org/licenses/by/4.0/

This article has been accepted for publication in IEEE Access. This is the author's version which has not been fully edited and
content may change prior to final publication. Citation information: DOI 10.1109/ACCESS.2022.3205641

works. The lack of radio resources affects the user experience of MNOs. The increasing traffic demand requires efficient schedulers in network radio resource usage.

Base station (BS) allocates fewer resource blocks (RBs) to UE transmitting at a higher rate during resource scheduling. UEs with greater signal-to-interference-plus-noise ratio (SINR), in particular, can use high-order modulation and coding techniques [6]–[8]. SINR is used for packet scheduling as a measurement of channel quality. SINR is measured by UE on an RB basis in 5G new radio (NR). SINR is not defined in 3GPP specifications; it is UE vendor-specific, and it is used a lot by MNOs [8]. SINR information is readily available on many commercial radio chipsets [9]. The SINR value for each RB is measured by all UEs and transmitted to the BS. This information is used by BS to make critical scheduling decisions.

As we are heading towards B5G, introducing flexible schedulers that exploit different parameters besides SINR is crucial. Futuristic applications such as vehicle-to-everything (V2X) communication and indoor localization depend on collaborative functionalities of communication and sensing [10]. Proposing a scheduler leads in paving the way toward emerging technologies such as the coexistence of communication and sensing. Leveraging radar sensory data at the communication terminals provides crucial awareness about the surrounding environment. An efficient way to acquire this awareness is by using low-cost radar sensors such as those initially designed for radar applications [11] or by leveraging joint communication-radar systems [12], [13]. The use of radar signals for improving communication has been studied in [14]–[19]. With this motivation, this paper investigates the potential of leveraging radar sensory data to guide the scheduling problem and provides the first real-world demonstration for radar-aided scheduling in a practical vehicular communication scenario. Our key idea is to use the information from the radar operating in a mmWave band to extract the scheduling information where communication happens. The developed solution leverages domain knowledge for radar signal processing to extract the relevant features fed to the communication modules.

Several physical layer (PHY)-based resource management options for radar and communication coexistence have recently been proposed, including power allocation, spatial beamforming, spectrum sharing with waveform design, and time sharing. Figure 1 illustrates the existing work in PHY and the proposed MAC-based work. The following deficiencies exist in the literature: essential principles and important performance measures linked to resource management are not adequately given [20]. The related radio resource management (RRM) studies for radar and communication coexistence systems are classified according to the resource management issues, i.e., spectrum sharing, power allocation, and interference management. Literature works have not been done on the radar-aided communication system in the MAC layer to the best of our knowledge [20]. The radio resource allocation and scheduling issues are not thoroughly

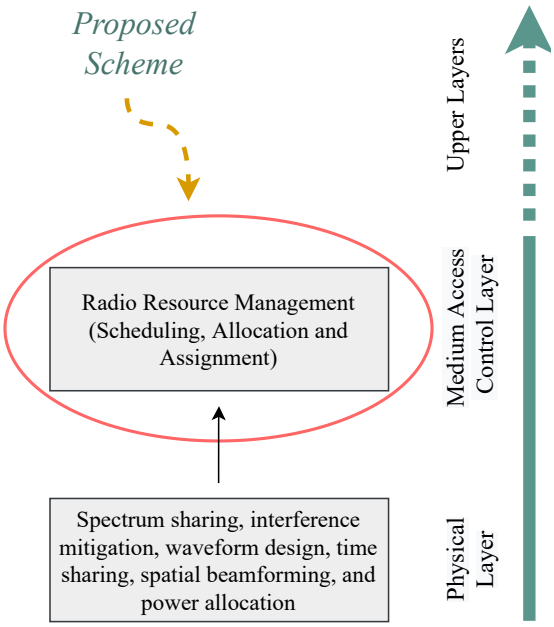


FIGURE 1. Existing PHY-based work in the literature and the proposed MAC-based work.

explored and debated. Different from the existing PHY-based resource management approaches [20], we propose a new scheduling algorithm tailored for the radar-aided communication systems by exploiting different parameters that have not been used before, which includes; range and velocity. The proposed solution provides a more flexible scheduling mechanism for the systems' available resources. This paper explains in detail how the estimated parameters can aid RRM, including a novel radar-aided communication scheduling mechanism.

The proposed scheduler is evaluated by analyzing its performance with the conventional resource scheduling algorithms. Classical physical resource block scheduling algorithms for the resource allocation are reviewed exhaustively in [21]. The UE scheduling concept based on fairness and reliability has been extensively studied in the literature [22], [23]. PF, RR, and BCQI are the most known scheduling algorithms. Our scheduler output maximizes the system performance of the communication system by maximizing its performance metrics, including communication data rate, spectral efficiency, and system throughput. Higher data rate and spectrum efficiency are required in indoor scenarios [24]. Spectral efficiency should be maximized, for example, if an unmanned aerial vehicle (UAV) covers a high number of targets so the scheduling data can be adequately collected. High system throughput is required due to its high reliability: Transmissions occur with a probability of 99.999% as in the V2X scenario [25]. In the V2X scenario, system throughput should be maximized to minimize collision probability.

Our main contributions are summarized as follows:

- For B5G networks, we propose a new radar-aided com-

This work is licensed under a Creative Commons Attribution 4.0 License. For more information, see https://creativecommons.org/licenses/by/4.0/

This article has been accepted for publication in IEEE Access. This is the author's version which has not been fully edited and
content may change prior to final publication. Citation information: DOI 10.1109/ACCESS.2022.3205641

munication scheduling algorithm.

- We developed and demonstrated, for the first time, the feasibility of radar-aided mmWave scheduling approaches in the real-world scenarios.
- The proposed scheduler is investigated based on the defined communication and radar coexistence applications and the acquired radar echo parameters.
- We evaluate the performance of the proposed scheme in terms of system throughput, spectral efficiency (SE), and data rate.

The merits of the proposed scheme can be stated as follows:

- We obtain a robust performance considering the conventional scheduling algorithms.
- A key feature of the proposed approach is that it incurs a reduced signaling load due to the nature of the radar echo signal that provides scheduling information and reducing the overhead of control channels.
- The proposed scheduler does not require changes in the per-UE scheduling policies implemented by BSs.
- The proposed scheduler fits different scenarios in B5G.

TABLE 1. List of Abbreviations

Abbreviations	Definition
BCQI	Best channel quality indicator
BS	Base station
B5G	5G and beyond
CSI	Channel state information
FMCW	Frequency modulated continuous wave
KPIs	Key performance indicators
MAC	Medium access control
MNOs	Mobile network operators
NR	New radio
PF	Proportional fair
PHY	Physical layer
PSD	Power spectral density
QoS	Quality of service
RAT	Radio access technology
RBs	Resource blocks
RR	Round robin
RRM	Radio resource management
SINR	Signal-to-interference-plus-noise ratio
SLS	System level simulation
SE	Spectral efficiency
TTI	Transmission time interval
3GPP	3rd Generation Partnership Project

Table 1 shows the list of abbreviations. The remainder of this paper is presented as follows. The system model is explained in Section II. The proposed scheme is illustrated in Section III. Simulation results are discussed in Section IV. Finally, the paper is concluded in Section V. [1]

II. SYSTEM MODEL

We investigate a radar echo-based scenario where a radar echo is reflected from the radar target [20]. In this scenario, the echo is exploited to obtain different scheduling parameters, such as target(s) range, velocity, and SINR information. We consider a mmWave vehicle-to-infrastructure (V2I) communication system, e.g., supported through 5G cellular network, where mmWave BSs serve as infrastructure for V2I communications. A monostatic radar system is collocated on the BS, which receives the radar echos from the surrounding targets, as illustrated in Figure 2. When a moving target is detected by the radar, the raw echo signal is sent to the communication module at the BS. Side information derived from radar mounted on the infrastructure operating in a given mmWave band is used to schedule the available resources of the vehicular communication system [5]. The objective of the considered system is to schedule the available resources in the BS relying on information extracted from the radar echo.

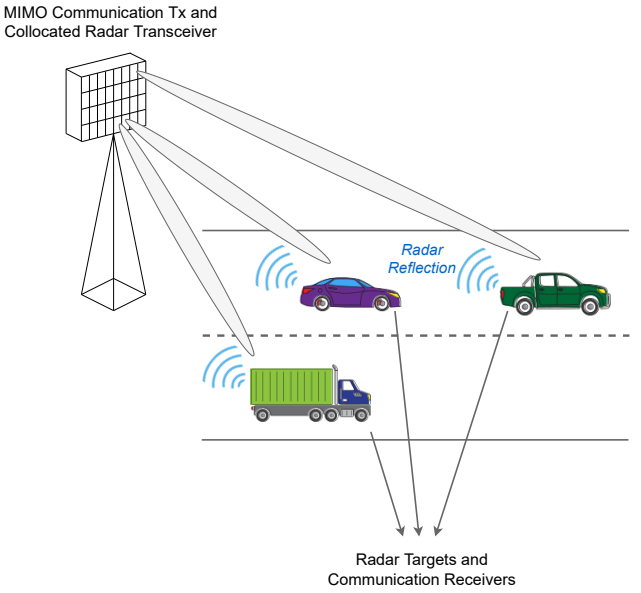


FIGURE 2. The system model where the radar information at the BS is leveraged to schedule the resources of multiple mobile users.

The system under consideration in this study comprises of a BS and multiple mobile users which act as radar targets and also as communication receivers. The BS has two major components: (i) A phased array-equipped mmWave communication terminal to communicate with the mobile users, and (ii) a collocated radar system using frequency modulated continuous wave (FMCW) signal. The system and signal models of the communication and radar components are briefly described in the next two subsections [5].

A. RADAR MODEL

In the considered system, the BS adopts an FMCW radar signal. The objective of this radar is to provide sensed observations of the surrounding environment. The FMCW radar achieves this objective by transmitting chirp signals whose frequency changes continuously with time. More specifically, the FMCW radar transmits a linear chirp signal starting at an

[1]Notation: Matrices and column vectors are represented by bold, capital and lowercase letters, respectively. $(.)^H$, $|.|$, and $\mathbb{E}[.]$ represent Hermitian transposition, absolute value, and expectation operations, respectively.

This work is licensed under a Creative Commons Attribution 4.0 License. For more information, see https://creativecommons.org/licenses/by/4.0/

This article has been accepted for publication in IEEE Access. This is the author's version which has not been fully edited and
content may change prior to final publication. Citation information: DOI 10.1109/ACCESS.2022.3205641

initial frequency f_c and linearly ramping up to $f_c + \mu t$, as given by [5]

$$s_{\text{chirp}}^{\text{tx}}(t) = \begin{cases} \sin\left(2\pi\left[f_c t + \frac{\mu}{2}t^2\right]\right) & \text{if } 0 \le t \le T_c \\ 0 & \text{otherwise} \end{cases} \quad (1)$$

where $\mu = B/T_c$ is the slope of the linear chirp signal with B and T_c representing the bandwidth and duration of the chirp.

A single radar measurement is obtained from the frame of duration T_f. In each frame, A chirp waves are transmitted with T_s waiting time between them. No more signals are sent until the end of the frame after the last chirp is transmitted. The transmitted signal from the radar frame can be expressed as [5]

$$s_{\text{frame}}^{\text{tx}}(t) = \sqrt{\mathcal{E}_t}\sum_{a=0}^{A-1} s_{\text{chirp}}^{\text{tx}}\left(t - a\left(T_c + T_s\right)\right), \quad 0 \le t \le T_f \quad (2)$$

where $\sqrt{\mathcal{E}_t}$ is the transmitter gain. The given transmitted signal is reflected from the target(s) in the environment, and the echo(s) are received back at the radar.

At the receiver, a quadrature mixer mixes the transmit and receive signals to produce the in-phase and quadrature samples. Following that, the combined signals are applied to a low-pass filter. The resulting signal, known as the intermediate frequency (IF) signal, represents the frequency and phase difference between the transmit and receive signals. If a single object exists in the environment, then the receive IF signal of a single chirp can be written as [5]

$$s_{\text{chirp}}^{\text{rx}}(t) = \sqrt{\mathcal{E}_t\mathcal{E}_r}\exp\left(j2\pi\left[\mu\tau t + f_c\tau - \frac{\mu}{2}\tau^2\right]\right), \quad (3)$$

where $\sqrt{\mathcal{E}_r}$ is the channel gain of the object, which depends on the path loss and radar cross section, $\tau = 2d/c$ is the round-trip delay of the reflected signal through the object, where d represents the distance between the object and the radar, and c denotes the speed of light.

The receive IF signal, s_{chirp} is then sampled at the sampling rate of the analog to digital converter (ADC), f_s, producing S samples for each chirp. Finally, the ADC samples from each frame are collected. For an FMCW radar with M_r receive antennas, each having the described RF receive chain, the resulting measurements of one frame can be denoted by $\mathbf{X} \in \mathbb{C}^{M_r \times S \times A}$. Given $\mathbf{X}$, important parameters for the proposed scheduler, including the range and velocity of moving target(s) in the surroundings, are extracted. Once the IF signal is obtained by the correlation of the transmitted and received echo, the parameters are extracted through a range-Doppler matrix that is obtained by the 2D fast Fourier transform method over each coherent processing interval [26]. It should be noted that the investigation of this method is not given in our paper since it is out of the scope of the proposed MAC-based scheduler. After the radar information is extracted, they are fed into the communication module. In the following subsection, the communication model is described.

B. COMMUNICATION MODEL

The considered BS employs a mmWave OFDM-based transmitter with M_A antennas which is used to communicate with multiple single-antenna mobile users. Adopting a narrowband channel model with P paths, the channel between the k-th user and the BS can be expressed as [27]

$$\mathbf{h_k} = \sum_{p=0}^{P-1} \alpha_p \mathbf{a}\left(\phi_p, \theta_p\right), \quad (4)$$

where α_p denotes the complex gain, $\mathbf{a}\left(\phi_p, \theta_p\right)$ is the array response vector of the BS, and ϕ_p, θ_p represent transmit azimuth and elevation angles of the p-th path at BS. In the downlink, the BS transmits the data symbol s_d to the user via the beamforming vector $\mathbf{f} \in \mathbb{C}^{M_A}$. The receive signal at the k-th user can be written as

$$y_k = \sqrt{\mathcal{E}_c}\mathbf{h_k}^H \mathbf{f} s_d + n, \quad (5)$$

where $n \sim \mathcal{CN}\left(0, \sigma^2\right)$ is the additive white Gaussian noise (AWGN) with a variance of σ^2, and $\sqrt{\mathcal{E}_c}$ is the transmitter gain of the BS. The signal-to-noise ratio (SNR) measured at the k-th user can be written as

$$SNR_k = \frac{\mathcal{E}_c|\mathbf{h_k}^H \mathbf{f}|P_{s_d}}{\sigma^2}, \quad (6)$$

where $P_{s_d} = \mathbb{E}[|s_d|^2]$ is the average power of s_d. SINR quantity should be measured as a pertinent indicator of the system's merit due to the unwanted signal that is picked up from other interfering BSs. The SINR, expressed in dB, measured at the target user is calculated as the SNR received from the intended BS minus the sum of power received from all other concurrently active BSs.

In the conventional communication channel state information (CSI) acquisition process, a known pilot signal is transmitted, and the communication beams are adjusted based on this signal [28]. The FMCW radar signal being a known signal, is used in the considered system to estimate the CSI for the communication users rather than transmitting additional pilots. As a result, pilot transmission overhead is reduced [26]. Furthermore, the radar measurements are leveraged to optimize the communication scheduler's performance. Based on the classical SINR measurements and the information gathered about the users from the echo signal, namely range (g_k) and velocity (v_k), the BS allocates its available resources to the users. The next section contains more information on the proposed multi-user scheduling scheme.

III. PROPOSED SCHEME

A new scheduling algorithm is proposed in this paper based on the range, velocity, and SINR information collected from the radar echo signal reflected from a target. The positions and velocities of vehicles are estimated. With the assistance of the radar, it is much easier to detect and track the moving

This work is licensed under a Creative Commons Attribution 4.0 License. For more information, see https://creativecommons.org/licenses/by/4.0/

This article has been accepted for publication in IEEE Access. This is the author's version which has not been fully edited and
content may change prior to final publication. Citation information: DOI 10.1109/ACCESS.2022.3205641

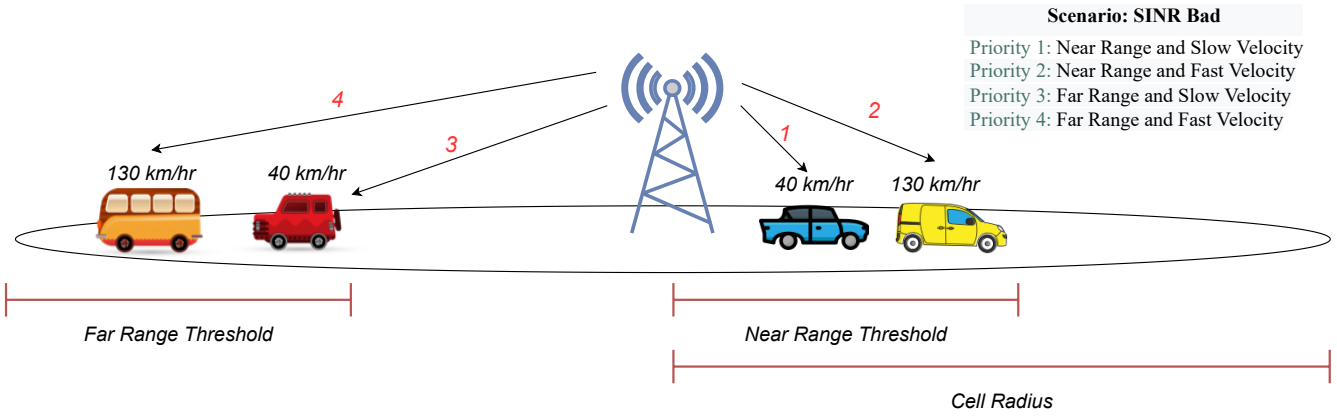


FIGURE 3. Scheduling priorities for bad SINR scenario.

vehicles. As shown in the field measurements in [29], the accuracy of position information provided by radar is higher than that by the Global Positioning System (GPS), resulting in a larger reduction in communication overhead when leveraging position information provided by a radar sensor than when leveraging GPS-based position. Based on the considered scheduling inputs, we set the following scheduling rules:

- UEs near the BS are prioritized due to low path loss; UEs in the center of the cell have a better channel quality indicator (CQI) and modulation scheme than UEs on the cell edge due to their proximity to the BS.
- Low-speed UEs are also prioritized due to their invariant channel conditions.
- UEs with better SINR are also prioritized due to their high power.

Figure 3 shows the scheduling priorities for bad SINR scenario. Regarding the range parameter, the conventional relationship between signal strength and range in free space is that the power of radio signals decreases with the square of the distance (d). The SNR decreases with d due to path loss, so range knowledge can be utilized to estimate received power and interference level. It should be noted that SINR should be high to receive the packet correctly. For example, the minimum required SINR could be 0 dB.

The range and velocity of the target can be extracted from the echo signal. The radar receiver uses different signal detection algorithms, e.g. correlation-based methods [30]. Based on the considered coexistence communication and radar use cases, it is found that range and velocity are the critical metrics to be measured. Figure 4 shows the proposed radar-aided communication scheduler. We consider a DL transmission from BS to UE in a typical radar-aided communication system.

The scheduling inputs are collected by the echo signal from the target. These inputs include range, velocity, and SINR information. The considered inputs are imported from the considered applications and use cases. Some numerical values of the considered inputs can be shown in Table 2 [37].

TABLE 2. Use cases proposed by Hexa-X [31] along with selected performance metrics, based on [32]–[36].

Use cases	Range	Velocity
Smart city	< 200m	< 50 km/h
Health care	0.1-10 m	< 1 m/s
Transport cobots	< 200 m	< 100 km/h
Industrial cobots	< 200 m	< 30 km/h
Public safety/security	< 200 m	< 50 km/h
Mixed reality, gaming	< 10 m	< 10 km/h

It should be noted that the velocity metric, shown in Table 2, refers to the maximal (relative) velocity that should be supported.

Based on the considered scheduling inputs, we set proper scheduling rules. The range-based scheduling rule is set where UE near the BS is prioritized due to low path loss. The velocity-based scheduling rule is set where low-speed UEs are prioritized due to their invariant channel conditions. The SINR-based scheduling rule is set where UEs with better SINR are also prioritized due to their high power. We consider a scenario where multiple BSs and UEs exist in the communication network. In this case, SINR is measured since the interfering BSs cause interference to the desired UE served by its serving BS [38]. For simplicity, equal radar and communication transmit powers are assumed.

The estimated range and velocity from the considered system, as well as some of the assumptions made in the proposed scheme, are described further. Basically, the mutual distance between k-th UE and b-th BS, d_{bk} (km), can be found as [39]

$$d_{bk} = \sqrt{(m_k, x_2 - m_b, x_1)^2 + (m_k, y_2 - m_b, y_1)^2}, \quad (7)$$

where m_k, x_2 and m_k, y_2 represent the position of k-th UE in the x and y axis, respectively, and m_b, x_1, m_b, y_1 denote the position of b-th BS in the x and y axis, respectively. Then, the path loss (dB) can be calculated as [40]

This work is licensed under a Creative Commons Attribution 4.0 License. For more information, see https://creativecommons.org/licenses/by/4.0/

This article has been accepted for publication in IEEE Access. This is the author's version which has not been fully edited and content may change prior to final publication. Citation information: DOI 10.1109/ACCESS.2022.3205641

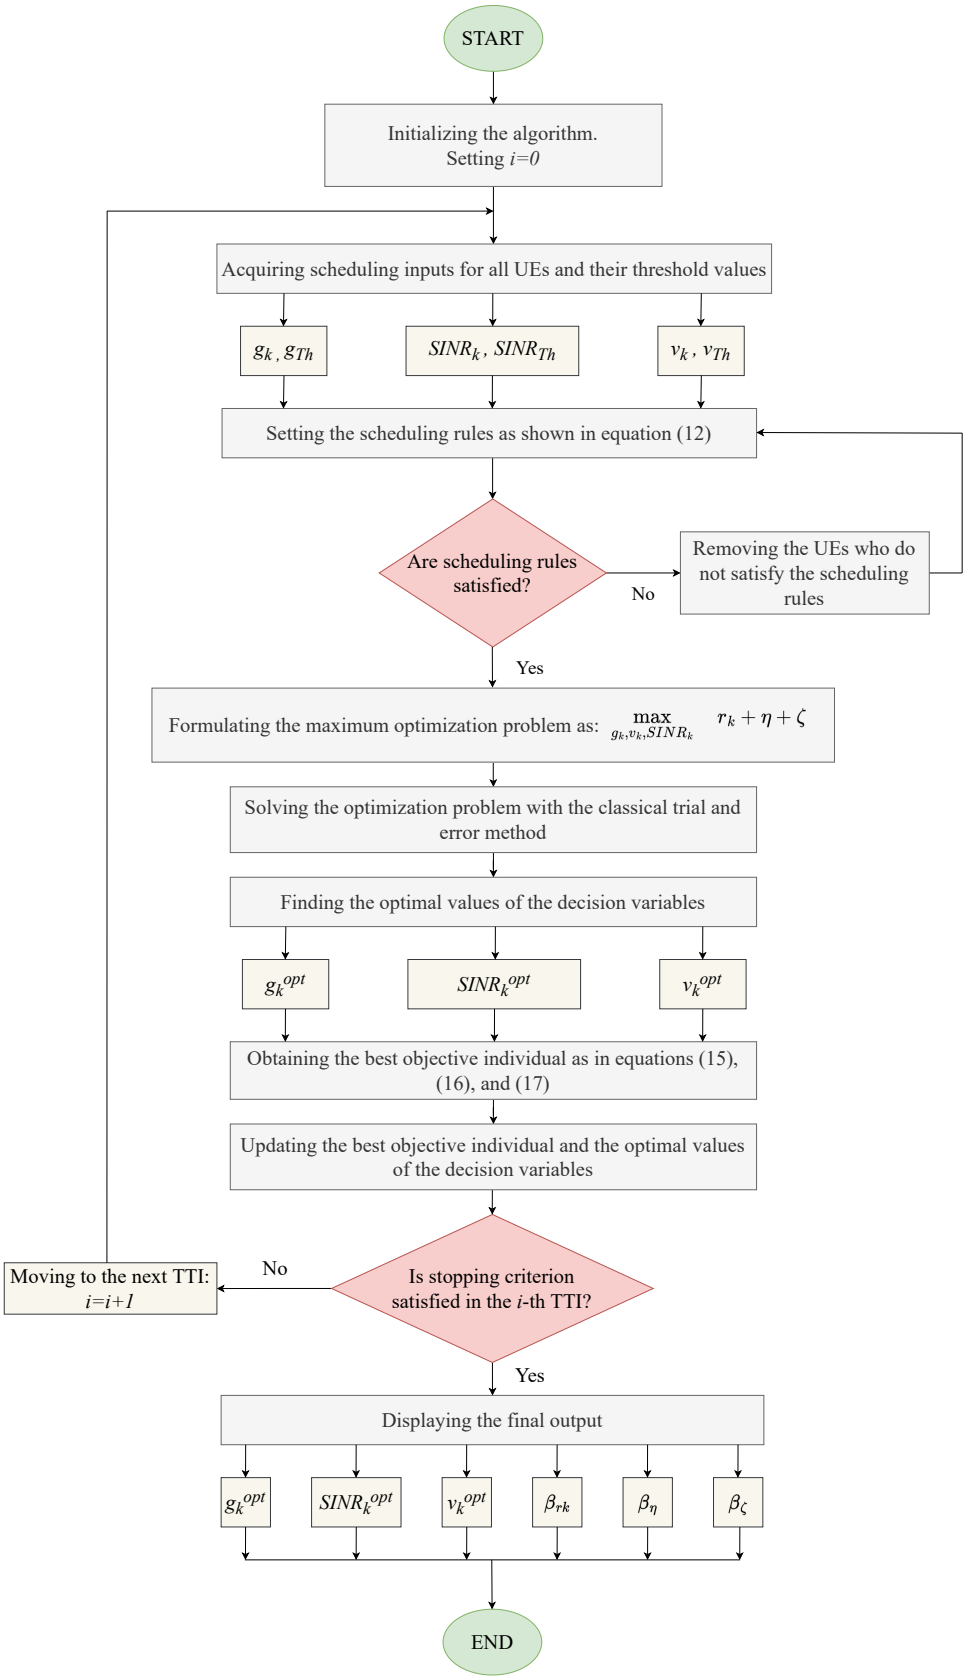


FIGURE 4. The proposed scheduling algorithm.

This work is licensed under a Creative Commons Attribution 4.0 License. For more information, see https://creativecommons.org/licenses/by/4.0/

This article has been accepted for publication in IEEE Access. This is the author's version which has not been fully edited and
content may change prior to final publication. Citation information: DOI 10.1109/ACCESS.2022.3205641

$$PL_{bk} = 32.45 + 20\log_{10}(d_{bk}) + 20\log_{10}(f_c), \quad (8)$$

where f_c represents the carrier frequency in MHz. The received power (dB) can be represented as

$$P_{bk}^{Rx} = P_{bk}^{Tx} - PL_{bk}, \quad (9)$$

where P_{bk}^{Tx} (dB) represents the transmitted power from b-th BS to k-th UE. Then, the SNR (dB) can be evaluated as follows:

$$SNR_k = P_{bk}^{Rx} - BN_0, \quad (10)$$

where N_0 is the power spectral density (PSD) of AWGN, and B represents the system bandwidth. The quality of the radio link between b-th BS and k-th UE can be measured by considering the interference effects caused by interfering BSs as

$$SINR_k = SNR_k - \sum_{v \in \mathbb{V}} P_{vk}^{Rx}, \quad (11)$$

where $\mathbb{V}$ is the set of interfering BSs and P_{vk}^{Rx} (dB) is the interference power received from the v-th interfering BS.

The goal of the proposed approach is to schedule BS transmissions so that the range (g_k), velocity (v_k), and SINR ($SINR_k$) are higher than specific threshold values g_{Th}, v_{Th}, and $SINR_{Th}$ for every UE k that can receive a transmission from a scheduled BS:

$$\begin{aligned} g_k &\geq g_{Th} \\ v_k &\geq v_{Th} \\ SINR_k &\geq SINR_{Th}. \end{aligned} \quad (12)$$

According to the SINR formulated in (11), the data rate of k-th UE can be expressed as

$$r_k = B\ \log_2(SINR_k) \quad (13)$$

The domain knowledge offered by the considered system provides a high reduction in communication overhead to extract g_k and v_k fed to the communication modules, thus enhancing SE (η). Furthermore, the accuracy in estimating g_k and v_k is proportional to the system throughput (ζ). Our scheduler maximizes r_k, η, and ζ. The decision variables that control the considered scheduler outputs are g_k, v_k, and $SINR_k$. The formulation of the objective function is shown as

$$\begin{aligned} \max_{g_k, v_k, SINR_k} \quad & r_k + \eta + \zeta \\ \text{s.t.} \quad & g_k \geq g_{Th} \\ & v_k \geq v_{Th} \\ & SINR_k \geq SINR_{Th} \end{aligned} \quad (14)$$

The values g_k^{opt}, v_k^{opt}, and $SINR_k^{opt}$ are optimally chosen using the classical trial and error method [41] to maximize the considered scheduling outputs. The employed trial and error method continues until the stopping criterion is satisfied. The selected values of the considered scheduler outputs correspond to the optimal factors at the i-th transmission time interval (TTI). Mathematically, the optimal solutions can be found as

$$\beta_{r_k} = \arg\max_i r_k^i \quad (15)$$

$$\beta_{\eta} = \arg\max_i \eta^i \quad (16)$$

$$\beta_{\zeta} = \arg\max_i \zeta^i \quad (17)$$

Algorithm 1 shows the step-by-step proposed radar-aided communication scheduling algorithm.

Algorithm 1 Radar-aided Communication Scheduling Algorithm

Input: The scheduling inputs.
Output: The scheduling outputs.
While stop criterion is not satisfied in i**-th** TTI

A. Pre-Processing
1: **Acquiring scheduling inputs for all UEs:** g_k, v_k, $SINR_k$.
2: **Acquiring the threshold values for the scheduling inputs:** g_{Th}, v_{Th}, $SINR_{Th}$.
B. Setting the scheduling rules
3: **Check** if $g_k \geq g_{Th}$.
4: **Check** if $v_k \geq v_{Th}$.
5: **Check** if $SINR_k \geq SINR_{Th}$.
6: **Else**
7: **Go to Step 1**
C. Forming the optimization problem
8: **Find** $\max_{g_k, v_k, SINR_k} r_k + \eta + \zeta$.
D. Finding the final output
9: **Find** g_k^{opt}, v_k^{opt}, and $SINR_k^{opt}$
10: **Set** $\beta_{r_k} = \arg\max_i r_k^i$
11: **Set** $\beta_{\eta} = \arg\max_i \eta^i$
12: **Set** $\beta_{\zeta} = \arg\max_i \zeta^i$

End

IV. RESULTS AND DISCUSSION

The performance of the proposed approach is evaluated using system level simulation (SLS), then the key performance indicators (KPIs) are investigated.

A. SIMULATION SETUP

Figure 5 shows the considered multi-cell scenario where the cellular topology is adopted in a single ring hexagonal structure with 7 5G BSs (gNBs), and their positions are at the center of the hexagonal cell in a square area. Users are dropped in the same area according to a uniform spatial distribution across the region of interest (ROI), which is around 7×7 km in size.

This work is licensed under a Creative Commons Attribution 4.0 License. For more information, see https://creativecommons.org/licenses/by/4.0/

This article has been accepted for publication in IEEE Access. This is the author's version which has not been fully edited and
content may change prior to final publication. Citation information: DOI 10.1109/ACCESS.2022.3205641

We focus on downlink transmissions without power control, as is the case in the majority of state-of-art proposals. It is assumed that BS knows the DL traffic demands that are cached in its buffer. UEs are associated to BSs based on the strongest average received power, i.e., based on distance, and do not change BS during the simulation. Fading is considered in the numerical simulations in addition to path loss, through a random variable, expressed in dB, distributed as a zero-mean Gaussian with a variance of σ^2 [42].

TABLE 3. System Parameters

Parameters/Symbols	Values/Description
Transmission bandwidth (B)	5 MHz
Carrier frequency (f_c)	5 GHz
BS transmit power (P_b^{Tx})	46 dBm
Noise PSD (N_0)	-174 dBm/Hz
Cell radius (R_c)	1400 m
Inter-site distance ($d_{k,v}$)	2425 m
Number of BSs (N_{BS})	7
Number of UEs per BSs (N_{UE-BS})	10
Total number of UEs (N_{UE})	70
Schedulers	RR, BCQI, PF
Number of available RBs (N_{rb})	15
Number of subchannels in a RB (N_c)	12
Number of available slots for scheduling (N_s)	20
Slot duration (T_s)	0.5 ms
Subchannel bandwidth (B_s)	180 kHz
Number of symbols in a RB (N_b)	7
BS configuration	Omni-directional
Transmission time interval (TTI)	2 ms
Number of Monte-Carlo Runs (N)	1000

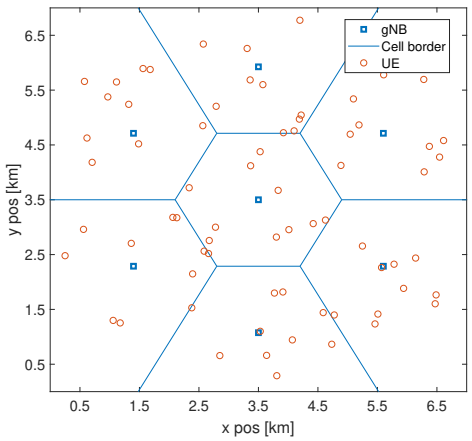


FIGURE 5. Simulation network layout.

The proposed scheduler selects the UE to transmit in each time slot. As a basic scenario, perfect CSI is assumed to be available at the start of each time slot for schedulers and that at most one UE is allowed to transmit in each slot. The parameter specifications for the number of slots (N_s), slot duration (T_s), subchannel bandwidth (B_s), TTI, etc. can be found in Table 3. The considered scheduling inputs are imported from Table 2.

B. SIMULATION METRICS

To understand the functioning of the proposed approach in much more detail, its performance is evaluated by considering the RR, PF, and BCQI methods in terms of average data rate (bits/s), throughput (bits/s), and SE (bits/s/Hz) over 1000 different channel realizations [43].

The average system and UE data rate, system throughput, and SE are found as follows, respectively:

$$\overline{r} = \frac{N_i}{N_{rb} N_c N_b T_s N_s} \tag{18}$$

$$\overline{r_k} = \frac{N_i}{N_{UE} N_s T_s} \tag{19}$$

$$\overline{\zeta} = \frac{N_i}{N_s T_s} \tag{20}$$

$$\overline{\eta} = \frac{N_i}{N_s \; TTI \; N_{rb} B_s} \tag{21}$$

where N_{UE}, N_i, N_{rb}, N_b, and N_c represent the total number of UEs, number of correctly received bits, number of available RBs, number of symbols in an RB, and number of subchannels in an RB, respectively.

C. STATE-OF-ART SCHEDULING ALGORITHMS

The most commonly used scheduling methods are PF, BCQI, and RR in the literature and practice [44]. The available RBs are distributed using the PF, BCQI, and RR. The performances of PF, RR, and BCQI are analyzed under the proposed approach. For the same simulation scenario, the three scheduling techniques are used.

The PF method is one of the most widely used methods for fair scheduling [23], aiming to provide fairness while taking advantage of good channel conditions and dynamically allocating resources to UEs. It is proven in [45] that the PF is not optimal due to capacity constraints. The RR method provides RBs for UEs without considering channel conditions; this is a simple procedure that ensures fairness [46]. The BCQI method is a common channel-dependent scheduler. The channel variations between UEs are exploited in this scheduler to maximize cell throughput at the expense of fairness [47].

D. SIMULATION RESULTS

Here, the simulation results are presented along with their discussions. MATLAB-based SLS is used to evaluate the performance of the proposed approach. The achieved results are shown with the classical methods, i.e., PF, RR, and BCQI. During the simulations, the default parameters are listed in Table 3. The simulation results here showed the realistic case in which the signal experiences interference and noise simultaneously. Because of that, the SINR of UE has been measured when the power of the noise term is zero. Then, the SINR reduces to the signal to interference ratio (SIR). Conversely, zero interference reduces the SINR to the SNR.

This work is licensed under a Creative Commons Attribution 4.0 License. For more information, see https://creativecommons.org/licenses/by/4.0/

This article has been accepted for publication in IEEE Access. This is the author's version which has not been fully edited and
content may change prior to final publication. Citation information: DOI 10.1109/ACCESS.2022.3205641

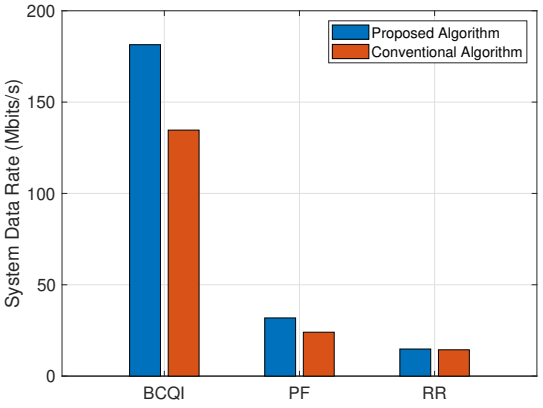


FIGURE 6. System data rate of the proposed scheduler compared to the conventional one.

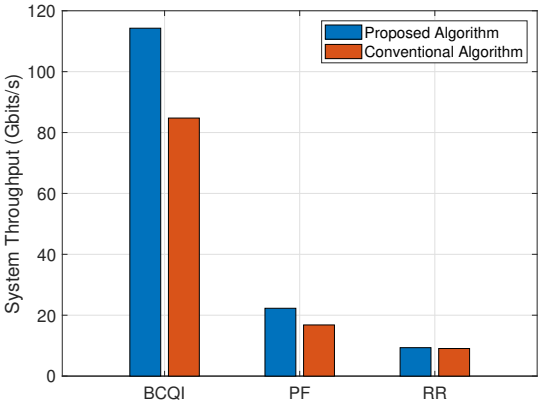


FIGURE 8. System throughput of the proposed scheduler compared to the conventional one.

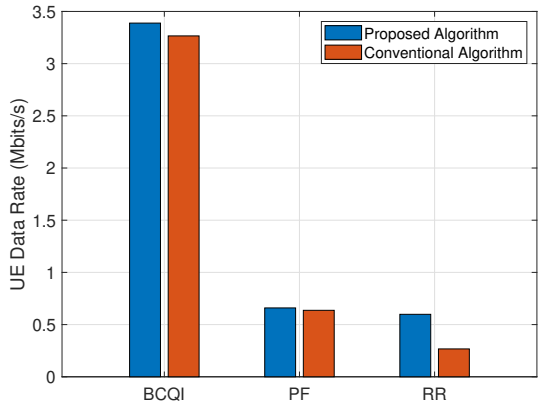


FIGURE 7. UE Data rate of the proposed scheduler compared to the conventional one.

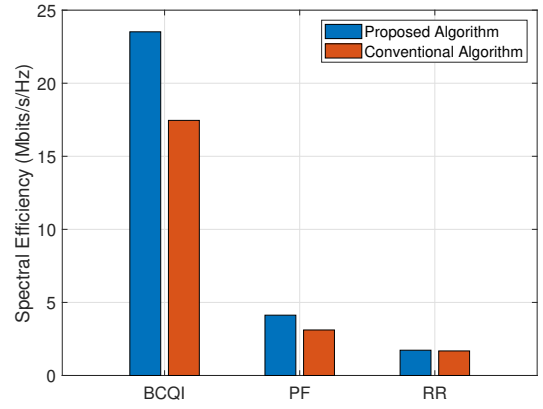


FIGURE 9. SE of the proposed scheduler compared to the conventional one.

Figures 6, 7, 8, and 9 show the performance of the proposed scheduler compared to the conventional one in terms of data rate, system throughput, and SE considering 15 available RBs. The achieved results show that the proposed scheduler, considering SINR, range, and velocity as inputs to the scheduler, is better than the conventional scheduler where SINR is only considered. It is demonstrated that the BCQI outperforms the PF and RR in terms of data rate, SE, and system throughput under the proposed scheme. The reason behind this is the channel-dependent characteristics of BCQI while assigning RBs, resulting in superior spectrum utilization. The results also show that the performance of the PF is slightly better than the RR. The RR performs the worst because it reduces throughput, data rate, and SE. On another side, it offers greater resource allocation fairness among different UEs. It is worth noting that the throughput depends on the simulated channel state, which influences the achievable transmission rate and the UE scheduling mechanism adopted by BS.

V. CONCLUSION

More effective scheduling algorithms are required to fulfill the needs of new applications such as radar and communication coexistence. We propose a new radar-aided scheduling algorithm in a practical vehicular communication scenario by utilizing some parameters, including range, velocity, and the conventional SINR measurements. The fundamental idea is to create the communication scheduler at the BS using the estimation of the scheduling inputs derived from the radar echo signal. The proposed scheme introduces a new degree of freedom to the scheduling design in radar-aided communication systems that leads to an efficient scheduling algorithm. The proposed scheme is evaluated in terms of data rate, UE and system throughput, and SE. The simulation results prove that the proposed scheduler outperformed the conventional one. Moreover, the obtained results show a significant performance of the proposed scheduler using the BCQI over the PF and RR. The results show that radar can be a valuable source of side information for the communication scheduler over a mmWave V2I link. The proposed algorithm

This work is licensed under a Creative Commons Attribution 4.0 License. For more information, see https://creativecommons.org/licenses/by/4.0/

This article has been accepted for publication in IEEE Access. This is the author's version which has not been fully edited and
content may change prior to final publication. Citation information: DOI 10.1109/ACCESS.2022.3205641

should be viewed as a preliminary solution to demonstrate the approach's practicality, although it can be modified further. As future work, the optimal solutions could be further improved by employing more efficient optimization methods than the adopted trial and error method. Furthermore, the scheduling rules can be extended by incorporating the angular parameter from the radar echo to enhance the performance of the scheduler.

ACKNOWLEDGMENT

This work has been supported by The Scientific and Technological Research Council of Turkey (TUBITAK) under grant No. 5190014.

REFERENCES

[1] P. Popovski, K. F. Trillingsgaard, O. Simeone, and G. Durisi, "5G wireless network slicing for eMBB, URLLC, and mMTC: A communication-theoretic view," IEEE Access, vol. 6, pp. 55 765–55 779, 2018.

[2] M. Alsenwi, N. H. Tran, M. Bennis, A. K. Bairagi, and C. S. Hong, "eMBB-URLLC resource slicing: A risk-sensitive approach," IEEE Communications Letters, vol. 23, no. 4, pp. 740–743, 2019.

[3] A. K. Bairagi, M. S. Munir, M. Alsenwi, N. H. Tran, S. S. Alshamrani, M. Masud, Z. Han, and C. S. Hong, "Coexistence mechanism between eMBB and URLLC in 5G wireless networks," IEEE Transactions on Communications, vol. 69, no. 3, pp. 1736–1749, 2020.

[4] M. Alsenwi, N. H. Tran, M. Bennis, S. R. Pandey, A. K. Bairagi, and C. S. Hong, "Intelligent resource slicing for eMBB and URLLC coexistence in 5G and beyond: A deep reinforcement learning based approach," IEEE Transactions on Wireless Communications, vol. 20, no. 7, pp. 4585–4600, 2021.

[5] U. Demirhan and A. Alkhateeb, "Radar aided 6G beam prediction: Deep learning algorithms and real-world demonstration," in 2022 IEEE Wireless Communications and Networking Conference (WCNC). IEEE, 2022, pp. 2655–2660.

[6] F.-C. Kuo, K.-C. Ting, H.-C. Wang, C.-C. Tseng, and M.-W. Chen, "Differentiating and scheduling LTE uplink traffic based on exponentially weighted moving average of data rate," Mobile Networks and Applications, vol. 22, no. 1, pp. 113–124, 2017.

[7] H. Holma and A. Toskala, LTE for UMTS: Evolution to LTE-Advanced. John Wiley & Sons, 2011.

[8] F. Afroz, R. Subramanian, R. Heidary, K. Sandrasegaran, and S. Ahmed, "SINR, RSRP, RSSI and RSRQ measurements in long term evolution networks," International Journal of Wireless & Mobile Networks, 2015.

[9] W. Liu, M. Kulin, T. Kazaz, A. Shahid, I. Moerman, and E. De Poorter, "Wireless technology recognition based on RSSI distribution at sub-nyquist sampling rate for constrained devices," Sensors, vol. 17, no. 9, p. 2081, 2017.

[10] A. Gameiro, D. Castanheira, J. Sanson, and P. P. Monteiro, "Research challenges, trends and applications for future joint radar communications systems," Wireless Personal Communications, vol. 100, no. 1, pp. 81–96, 2018.

[11] B. P. Ginsburg, K. Subburaj, S. Samala, K. Ramasubramanian, J. Singh, S. Bhatara, S. Murali, D. Breen, M. Moallem, K. Dandu et al., "A multimode 76-to-81GHz automotive radar transceiver with autonomous monitoring," in 2018 ieee international solid-state circuits conference-(isscc). IEEE, 2018, pp. 158–160.

[12] P. Kumari, J. Choi, N. González-Prelcic, and R. W. Heath, "IEEE 802.11 ad-based radar: An approach to joint vehicular communication-radar system," IEEE Transactions on Vehicular Technology, vol. 67, no. 4, pp. 3012–3027, 2017.

[13] A. Taha, Q. Qu, S. Alex, P. Wang, W. L. Abbott, and A. Alkhateeb, "Millimeter wave MIMO-based depth maps for wireless virtual and augmented reality," IEEE Access, vol. 9, pp. 48 341–48 363, 2021.

[14] N. Gonzalez-Prelcic, R. Méndez-Rial, and R. W. Heath, "Radar aided beam alignment in mmwave V2I communications supporting antenna diversity," in 2016 Information Theory and Applications Workshop (ITA). IEEE, 2016, pp. 1–7.

[15] Z. Chen, Z. Cao, X. He, Y. Jin, J. Li, and P. Chen, "DoA and DoD estimation and hybrid beamforming for radar-aided mmwave MIMO vehicular communication systems," Electronics, vol. 7, no. 3, p. 40, 2018.

[16] G. R. Muns, K. V. Mishra, C. B. Guerra, Y. C. Eldar, and K. R. Chowdhury, "Beam alignment and tracking for autonomous vehicular communication using IEEE 802.11 ad-based radar," in IEEE INFOCOM 2019-IEEE conference on computer communications workshops (INFOCOM WKSHPS). IEEE, 2019, pp. 535–540.

[17] A. Ali, N. González-Prelcic, and A. Ghosh, "Passive radar at the roadside unit to configure millimeter wave vehicle-to-infrastructure links," IEEE Transactions on Vehicular Technology, vol. 69, no. 12, pp. 14 903–14 917, 2020.

[18] C. Jiao, Z. Zhang, C. Zhong, X. Chen, and Z. Feng, "Millimeter wave communication with active ambient perception," IEEE Transactions on Wireless Communications, vol. 18, no. 5, pp. 2751–2764, 2019.

[19] F. Liu, W. Yuan, C. Masouros, and J. Yuan, "Radar-assisted predictive beamforming for vehicular links: Communication served by sensing," IEEE Transactions on Wireless Communications, vol. 19, no. 11, pp. 7704–7719, 2020.

[20] N. C. Luong, X. Lu, D. T. Hoang, D. Niyato, and D. I. Kim, "Radio resource management in joint radar and communication: A comprehensive survey," IEEE Communications Surveys Tutorials, vol. 23, no. 2, pp. 780–814, 2021.

[21] M. Richart, J. Baliosian, J. Serrat, and J.-L. Gorricho, "Resource slicing in virtual wireless networks: A survey," IEEE Transactions on Network and Service Management, vol. 13, no. 3, pp. 462–476, 2016.

[22] M. Dianati, X. Shen, and K. Naik, "Cooperative fair scheduling for the downlink of CDMA cellular networks," IEEE Transactions on Vehicular Technology, vol. 56, no. 4, pp. 1749–1760, 2007.

[23] S. Mosleh, L. Liu, and J. Zhang, "Proportional-fair resource allocation for coordinated multi-point transmission in LTE-Advanced," IEEE Transactions on Wireless Communications, vol. 15, no. 8, pp. 5355–5367, 2016.

[24] A. Zeshan, M. Karbalayghareh, F. Miramirkhani, M. Uysal, and T. Baykas, "Comparative performance evaluation of VLC, LTE and WLAN technologies in indoor environments," in 2021 IEEE International Black Sea Conference on Communications and Networking (BlackSeaCom), 2021, pp. 1–6.

[25] I. Kabashkin, "Reliable V2X communications for safety-critical intelligent transport systems," in 2017 Advances in Wireless and Optical Communications (RTUWO), 2017, pp. 251–255.

[26] M. Mert Şahin and H. Arslan, "Multi-functional coexistence of radar-sensing and communication waveforms," in 2020 IEEE 92nd Vehicular Technology Conference (VTC2020-Fall), 2020, pp. 1–5.

[27] Y. Zhang, M. Alrabeiah, and A. Alkhateeb, "Reinforcement learning of beam codebooks in millimeter wave and terahertz MIMO systems," IEEE Transactions on Communications, vol. 70, no. 2, pp. 904–919, 2021.

[28] J. C. E. Jiménez, M. J. F.-G. García, and D. Méndez-Romero, "Pilot-assisted channel estimation," Wiley 5G Ref: The Essential 5G Reference Online, pp. 1–19, 2019.

[29] A. Graff, A. Ali, and N. González-Prelcic, "Measuring radar and communication congruence at millimeter wave frequencies," in 2019 53rd Asilomar Conference on Signals, Systems, and Computers. IEEE, 2019, pp. 925–929.

[30] A. Graff, Y. Chen, N. González-Prelcic, and T. Shimizu, "Deep learning-based link configuration for radar-aided multiuser mmwave vehicle-to-infrastructure communication," arXiv preprint arXiv:2201.04657, 2022.

[31] G. D'Aria et al., "Expanded 6G vision, use cases and societal values–including aspects of sustainability, security and spectrum," Technical report, Hexa-X Project, Tech. Rep., 2021.

[32] 3rd Generation Partnership Project (3GPP), "Study on Communication for Automation in Vertical Domains (CAV)," Technical Report 22.804, V16.2.0, Dec. 2018.

[33] ——, "Service Requirements for the 5G System," Technical specification 22.261, V17.1.0, Dec. 2019.

[34] G. I. Association et al., "Automotive vertical sector," White Paper 5G-PPP, 2015.

[35] D. Vasisht, G. Zhang, O. Abari, H.-M. Lu, J. Flanz, and D. Katabi, "In-body backscatter communication and localization," in Proceedings of the 2018 Conference of the ACM Special Interest Group on Data Communication, 2018, pp. 132–146.

[36] T. U. of Sheffield Advanced Manufacturing Research Centre (AMRC), "Untangling the requirements of a digital twin," White Paper, 2021.

[37] H. Wymeersch, D. Shrestha, C. M. De Lima, V. Yajnanarayana, B. Richerzhagen, M. F. Keskin, K. Schindhelm, A. Ramirez, A. Wolfgang,

This work is licensed under a Creative Commons Attribution 4.0 License. For more information, see https://creativecommons.org/licenses/by/4.0/

This article has been accepted for publication in IEEE Access. This is the author's version which has not been fully edited and
content may change prior to final publication. Citation information: DOI 10.1109/ACCESS.2022.3205641

M. F. De Guzman et al., "Integration of communication and sensing in 6G: A joint industrial and academic perspective," in 2021 IEEE 32nd Annual International Symposium on Personal, Indoor and Mobile Radio Communications (PIMRC). IEEE, 2021, pp. 1–7.

[38] N. A. Ali, H.-A. M. Mourad, H. M. ElSayed, M. El-Soudani, H. H. Amer, and R. M. Daoud, "General expressions for downlink signal to interference and noise ratio in homogeneous and heterogeneous LTE-Advanced networks," Journal of advanced research, vol. 7, no. 6, pp. 923–929, 2016.

[39] S. Sarepalli, "LTE downlink scheduling algorithms," Ph.D. dissertation, 2016, copyright - Database copyright ProQuest LLC; ProQuest does not claim copyright in the individual underlying works; Last updated - 2021-05-21. [Online]. Available: https://www.proquest.com/dissertations-theses/lte-downlink-scheduling-algorithms/docview/1844988633/se-2?accountid=191742

[40] I. Poole, "Free space path loss: Details, formula, calculator," http://radio-electronics.com.

[41] H. P. Young, "Learning by trial and error," Games and economic behavior, vol. 65, no. 2, pp. 626–643, 2009.

[42] Z. Ren, G. Wang, Q. Chen, and H. Li, "Modelling and simulation of rayleigh fading, path loss, and shadowing fading for wireless mobile networks," Simulation Modelling Practice and Theory, vol. 19, no. 2, pp. 626–637, 2011.

[43] J. S. E. Dahlman, S. Parkvall, 4G: LTE/LTE-Advanced for Mobile Broadband. Academic press, 2013.

[44] V. C. Gungor and O. G. Uyan, "QoS-aware downlink scheduling algorithm for LTE networks: A case study on edge users," in 2017 25th Signal Processing and Communications Applications Conference (SIU). IEEE, 2017, pp. 1–4.

[45] A. Sinha, M. Andrews, and P. Ananth, "Scheduling algorithms for 5G networks with mid-haul capacity constraints," in 2019 International Symposium on Modeling and Optimization in Mobile, Ad Hoc, and Wireless Networks (WiOPT), 2019, pp. 1–8.

[46] M. T. Kawser, H. Farid, A. R. Hasin, A. M. Sadik, and I. K. Razu, "Performance comparison between round robin and proportional fair scheduling methods for LTE," International Journal of Information and Electronics Engineering, vol. 2, no. 5, pp. 678–681, 2012.

[47] K. Arshad, "LTE system level performance in the presence of CQI feedback uplink delay and mobility," in 2015 International Conference on Communications, Signal Processing, and their Applications (ICCSPA'15), 2015, pp. 1–5.



AHMAD M. JARADAT received the B.Sc. and M.Sc. degrees in Communication Engineering from Yarmouk University, Irbid, Jordan, in 2013 and 2016, respectively. He is currently pursuing the Ph.D. degree as a member of the Communications, Signal Processing, and Networking Center with Istanbul Medipol University, Turkey. He was Electronic Engineering Taught Postgraduate Associate with the Electronic Engineering Department, Queen Mary, University of London at United Kingdom. His current research interests are in multi-dimensional modulation techniques, 5G and beyond waveform design and multiple access schemes for future 5G and beyond wireless systems, advanced scheduling for future radio access, signal and channel identification.



AHMED NAEEM received his BS (Electrical Engineering) degree from FAST-NUCES, Peshawar, Pakistan in 2016 and from the same university received his MS degree in 2019. He is currently pursuing his Ph.D. degree as a research assistant at the Communications, Signal Processing, and Networking Center with Istanbul Medipol University, Turkey. His current research interests are in joint radar and communication, 5G and beyond waveform design, blind signal analysis, machine learning and non-terrestrial networks.



MEHMET IZZET SAĞLAM received his B.S. degree in electrical and electronics engineering from Çukurova University in 2001, and his M.S. and PhD degrees in wireless communication from Istanbul Technical University, in 2003 and 2018, respectively. His executive MBA degree is from Yıldız Technical University. He is a researcher and 3GPP RAN WG2 delegate at Turkcell R&D. His current research interests are on radio resource management of wireless systems and non-terrestrial networks.



MESUT KARTAL (M'91) received his MS degree in 1993 and Ph.D. degree in 2000. Currently, he is still a professor at Istanbul Technical University, Department of Electronics and Communication Engineering. He took part in the establishment of the Satellite Communication and Remote Sensing Center at Istanbul Technical University and has been involved in the management and project teams of the center, which was established in 1999, and has made various projects and scientific publications. His research interests include remote sensing, RF communication systems, antennas and FSS design, inverse problems, RF and microwave design engineering, as well as modelling, design, simulations and analysis, and CAD techniques in high frequency region.

This work is licensed under a Creative Commons Attribution 4.0 License. For more information, see https://creativecommons.org/licenses/by/4.0/

This article has been accepted for publication in IEEE Access. This is the author's version which has not been fully edited and
content may change prior to final publication. Citation information: DOI 10.1109/ACCESS.2022.3205641



HÜSEYIN ARSLAN (IEEE Fellow, IEEE Distinguished Lecturer, Member of Turkish Academy of Sciences) received his BS degree from the Middle East Technical University (METU), Ankara, Turkey in 1992; his MS and Ph.D. degrees were received respectively in 1994 and 1998 from Southern Methodist University (SMU), Dallas, TX. From January 1998 to August 2002, he was with the research group of Ericsson, where he was involved with several projects related to 2G and 3G wireless communication systems. Between August 2002 and 2022, Dr. Arslan was a Professor with the Electrical Engineering Department, at the University of South Florida. In December 2013, he joined Istanbul Medipol University to found the Engineering College, where he has been working as the Dean of the School of Engineering and Natural Sciences. In addition, he has worked as a part-time consultant for various companies and institutions including Anritsu Company and The Scientific and Technological Research Council of Turkey.

Dr. Arslan conducts research in wireless systems, with emphasis on the physical and medium access layers of communications. His current research interests are on 6G and beyond radio access technologies, physical layer security, interference management (avoidance, awareness, and cancellation), cognitive radio, multi-carrier wireless technologies (beyond OFDM), dynamic spectrum access, co-existence issues, non-terrestial communications (High Altitude Platforms), joint radar (sensing) and communication designs. Dr. Arslan has been collaborating extensively with key national and international industrial partners and his research has generated significant interest in companies such as InterDigital, Anritsu, NTT DoCoMo, Raytheon, Honeywell, Keysight technologies. Collaborations and feedback from industry partners has significantly influenced his research. In addition to his research activities, Dr. Arslan has also contributed to wireless communication education. He has integrated the outcomes of his research into education which lead him to develop a number of courses at the University of South Florida and Istanbul Medipol University. He has developed a unique "Wireless Systems Laboratory" course (funded by the National Science Foundation and Keysight technologies) where he was able to teach not only the theory but also the practical aspects of wireless communication system with the most contemporary test and measurement equipment.

Dr. Arslan has served as general chair, technical program committee chair, session and symposium organizer, workshop chair, and technical program committee member in several IEEE conferences. He is currently a member of the editorial board for the IEEE Surveys and Tutorials and the Sensors Journal. He has also served as a member of the editorial board for the IEEE Transactions on Communications, the IEEE Transactions on Cognitive Communications and Networking (TCCN), and several other scholarly journals by Elsevier, Hindawi, and Wiley Publishing.

This work is licensed under a Creative Commons Attribution 4.0 License. For more information, see https://creativecommons.org/licenses/by/4.0/